

SERIES
F3000



HEAVY-DUTY ENGINEER

F3000 SERIES



High Adaptability

The low-speed, high-torque engine delivers quick start and excellent climbing ability to adapt to all kinds of harsh engineering road conditions.


By optimizing the design of the cooling and exhaust system, ground clearance of F3000 is increased, making it better suited to special road conditions.



High Capacity

The advanced axle adopts the double-stage speed reduction axle technology and heavy-duty off-road vehicle axle technology, and has undergone more than 1.3 million times of strong load capacity test without failure.

Steel plate spring suspension with a new type of balanced suspension bring better load capacity and durability.

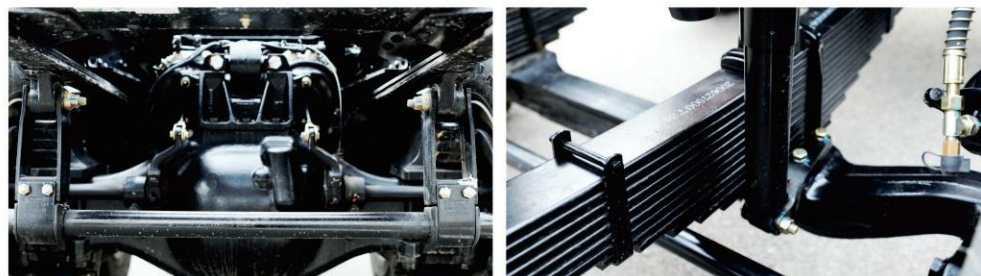



High Driving Smoothness

The cab hydraulic suspension with high-quality shock absorbers and stabilizer bars on the front and rear axles allows to cope with bumpy roads.



F3000 DUMP TRUCK

Super Edition //



Super Reliability

Super Protection

- 5mm steel front bumper
- Independent headlight and taillight grille
- 6mm reinforced oil pan protection grid
- Fuel tank protection: corrosion-resistant stainless steel fuel tank + wide three pull belt fixed + 3mm steel bottom plate
- Anti-theft device: fuel tank system level anti-theft + battery box anti-theft

Super Sealing

- Optimizing the cross-sectional structure of sealing strip makes it possible to improve door sealing while reducing closing force by more than 20%.
- The closed generator effectively blocks debris in the mine.
- The lateral exhaust effectively prevents dust from flying.
- Dustproof nuts reduce the risk of nut corrosion.
- Improved sealing of the front axle bearing prevents debris from entering.

Super Parts

- Ultra-reliable casting brackets: air filter bracket, muffler bracket, fender brackets.
- Brake drums made of reinforced gray iron have significantly increased strength and reduced the risk of cracking.
- The long-lasting filter has a fuel impurity filtration efficiency of up to 99.82% with a service life of up to 120,000 kilometers.



Super Trafficability

- Ground clearances of all kinds of equipment adopted on F3000 Super Edition have been all raised for higher trafficability, including radiator, accumulator box, muffler, air reservoir, fuel tank.

Super Capacity

- The total thickness of the rear suspension leaf spring is as high as 319.5mm to adapt to the mining area transportation scene.
- The 18mm thick rim allows the single wheel load capacity to increase by 200kg.

Scene customization tire patterns allow the F3000 Super Edition to adapt to a variety of harsh road conditions.

Super Appearance

- The full-coverage integrated matte front bumper takes into account both aesthetics and practicality.





F3000 Trailer Truck				15/16		TRUCKING MADE BETTER		
Drive			4x2		6x4			
GCW(t)			50		90		90-120	
Main configuration	Cab	Type	Extended flat roof					
		Suspension	Hydraulic suspension					
		Seat	Hydraulic main seat					
		Air conditioner	Electric automatic constant temperature AC					
	Engine	Model	WP10/WP12	WP10/WP12/ISM11		WP10/WP12/ISM11		
		Emmission standard	EURO II-EURO V	EURO II-EURO V		EURO II-EURO V		
		Rated power (hp)	340/380/400/430	340/380/385/400/420/430		380/400/420/430		
	Transmission	Model	FAST MT(10/12)					
	Axle	Front axle	9.5t					
		Rear axle	13t double-stage			16t double-stage		
		Ratio	3.866	4.266		4.266		
	Chassis	Dimension (mm)	(940-850) ×300(single-layer 8)	850×300(8+5)		850×300(8+7)		
		Wheel base (mm)	3600	3175+1400		3175+1400		
		Fuel tank	400L aluminum alloy					
		Tire	12R22.5	12.00R20				
		Suspension	Front and rear multi-leaf springs					
Applicable condition	Applicable road condition		High-speed, high-grade highways		Paved road			
	Economic/Max speed (km/h)		50-70/100		50-65/90		50-65/90	
Basic equipment			Electric window lifter, metal bumper, hinged boarding pedal, saddle 50		Electric window lifter, metal bumper, hinged boarding pedal, saddle 90		Electric window lifter, metal bumper, hinged boarding pedal, saddle 90	
Options			Single-cooled air conditioners, side guardrails, water tank protection grille, electric flipping, deflector		Single-cooled air conditioners, side guardrails, water tank protection grille, electric flipping, deflector, headlight grille, 600L aluminum alloy fuel tank		Single-cooled air conditioners, side guardrails, water tank protection grille, electric flipping, deflector, headlight grille, 600L aluminum alloy fuel tank, 12R22.5	



F3000 Dump Truck			17/18			TRUCKING MADE BETTER
Drive			6x4	8x4	8x4	
GCW(t)			50	70	90	
Main configuration	Cab	Type	Medium-length flat roof	Medium-length flat roof	Standard	
		Suspension	Hydraulic suspension			
		Seat	Hydraulic main seat			
		Air conditioner	Electric automatic constant temperature AC			
	Engine	Model	WP10/WP12/M10/ISM11			
		Emmission standard	EURO II-EURO V			
		Rated power (hp)	336/340/375/380/385/400/420/430		380/385/400/420/430/460	
	Transmission	Model	FAST MT(10/12)			
	Axle	Front axle	9.5t			
		Rear axle	16t double-stage			
		Ratio	5.262/5.92	4.769/5.262	5.262/4.769	
	Chassis	Dimension (mm)	850×300(8+7)		850×320(8+7+8)	
		Wheel base (mm)	3775+1400	1800+3575+1400/1800+3775+1400		
		Wheel overhang (mm)	850	1000		
		Fuel tank	400L aluminum alloy			
		Tire	12.00R20			
		Suspension	Front and rear multi-leaf springs			
	Tipper container		5600×2300×1500	7400×2300×1500/7600×2300×1500		
Applicable condition	Applicable road condition		Muddy and potholed roads with steep grades			
	Economic/Max speed (km/h)		40-55/75	45-60/85	45-60/80	
Basic equipment			Electric window lifter, metal bumper, two-stage pedal, water tank protection grille			



F3000 Cement Mixer			19/20	TRUCKING MADE BETTER
Drive			6x4	
GCW(t)			35	
Main configuration	Cab	Type	Medium-length flat roof	
		Suspension	Hydraulic suspension	
		Seat	Air/Hydraulic main seat	
		Air conditioner	Electric automatic constant temperature AC	
	Engine	Model	WP10/WP12/ISM11	
		Emmission standard	EURO II-EURO V	
		Rated power (hp)	340/375/380/400	
	Transmission	Model	FAST MT(10/12)	
	Axle	Front axle	9.5t	
		Rear axle	16t double-stage	
		Ratio	5.262/5.92	
	Chassis	Dimension (mm)	850×300(8+7)	
		Wheel base (mm)	3775+1400	
		Wheel overhang (mm)	1500	
		Fuel tank	300L aluminum alloy	
		Tire	12.00R20	
		Suspension	Front and rear multi-leaf springs	
		Mixer (m³)	10	
Applicable condition	Applicable road condition	Highways, paved roads		
	Economic/Max speed (km/h)	45-60/85		
Basic equipment			Electric window lifter, metal bumper, hinged boarding pedal, spare tire carrier, remote throttle controller (electronically controlled engine)	



F3000 Oil Tanker			21/22	TRUCKING MADE BETTER
Drive			4x2	
GCW(t)			20	
Main configuration	Cab	Type	Medium-length flat roof	
		Suspension	Hydraulic suspension	
		Seat	Air/Hydraulic main seat	
		Air conditioner	Electric air conditioning	
	Engine	Model	WP10	
		Emmission standard	EURO II-EURO V	
		Rated power (hp)	300/340/380	
	Transmission	Model	FAST MT(9/10)	
	Axle	Front axle	7.5t	
		Rear axle	13t double-stage	
		Ratio	5.262	
	Chassis	Dimension (mm)	850×300(8+5)	
		Wheel base (mm)	4600	
		Wheel overhang (mm)	1900	
		Fuel tank	300L aluminum alloy	
		Tire	12.00R20	
		Suspension	Front and rear multi-leaf springs	
		Tanker (m³)	10	
Applicable condition	Applicable road condition	Highway		
	Economic/Max speed (km/h)	50-70/90		
Basic equipment			Electric window lifter, metal bumper, hinged boarding pedal, spare tire carrier	